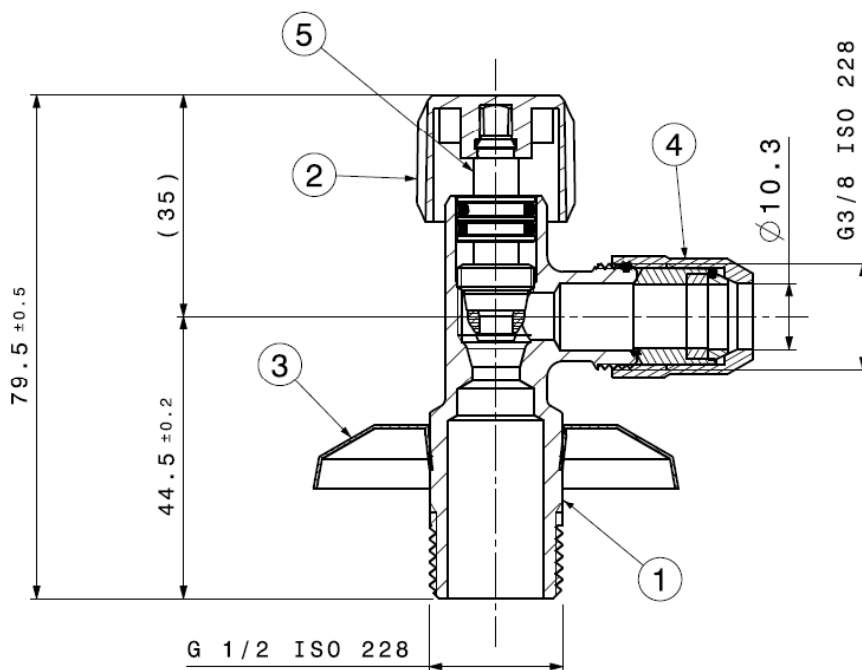
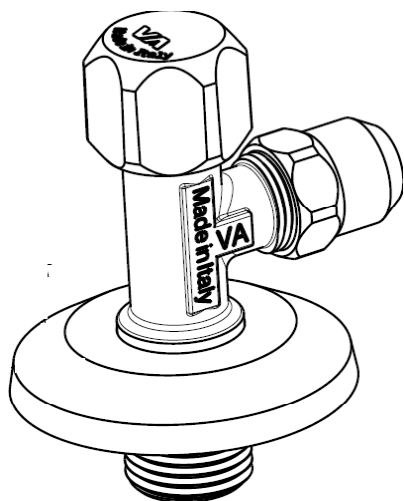


C407681

Rubinetto STD 1/2" x 3/8" dado conico alto scodellino

Angle valve STD 1/2" x 3/8" chrome with special conical nut


Materiali / Materials	1	Corpo / Body	Ottone / Brass EN 12165 – CW617N
	2	Maniglie / Handle	ABS cromato / chrome plated
	3	Rosone / Rosace	Acciaio / steel
	4	Dado conico alto scodellino / special high conical nut	Ottone-nylon-NBR / Brass-nylon-NBR
	5	Vitone / Spindle	Ottone / Brass EN 12164 – CW614N

Pressione di utilizzo / Working pressure	Min.	superiore a 0,5 bar / above 0,5 bar
	Max	10 bar
Portata / Flow rate	3 bar	20 l/m
Temperatura di utilizzo / Working temperature	Min.	5° C
	Max	90° C
	Recommended	5 ÷ 65 ° C
Normativa di riferimento / Reference standards	DVGW	DIN 3227
	LGA	EN ISO 3822
	ETA	EN 1213