
Varmt vand fra solens Kinaveksler MINI

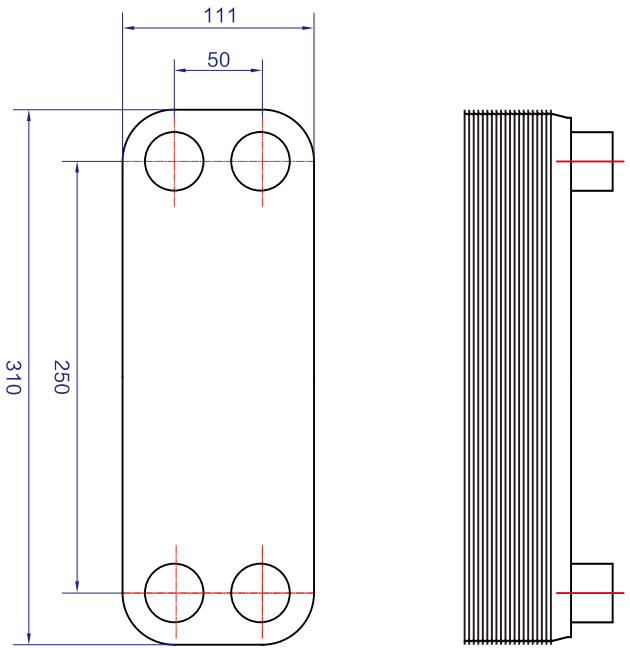

Single heat exchange area (㎡)	0.026
Design pressure (MPa)	3.0/4.5
Test pressure (MPa)	4.5/6.5
Sheet thickness (mm)	9+2.4N
Effective heat transfer area (㎡)	0.026(N−2)
Design temperature (℃)	−100/+200
Channel type	D
Plate Material	316L
Number of plate	10 20 30
Connection	3/4"
Max flowrate[m3/h]	8.1
Weight[kG]	1.3+0.12n

(N is the number of plates)