

For sealed heating (acc. to EN12828) and cooling installations.


When the temperature in the installation rises, the system water will expand. The 'expansion water' is stored temporarily in the expansion vessel to keep the pressure in the installation at the correct level. Each vessel is factory tested.

Fordele

- The thread of the system connection is uncoated, ensuring problem free connection.
- The fixed bag-type diaphragm prevents the water to come in contact with the bare steel of the vessel.
- Nitrogen gas filling for longer maintenance of pre-pressure.

Tekniske informationer

- Maximum working pressure: 6.0 bar.
- Red (RAL 3002) epoxy powder coating (also available in white (RAL9010)).
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Min. / max. temperature diaphragm: -10 / 70 °C.
- Diaphragm: EPDM.
- All welded construction.
- Zinc plated flange.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with Pressure Equipment Directive 2014/68/EU.
- Baseflex 35 - 80: Standard equipped with legs.

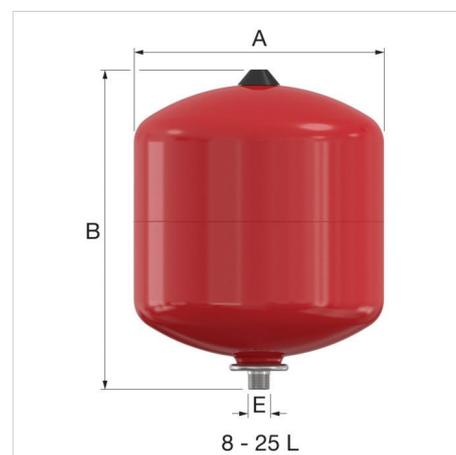

Beskrivelse	Baseflex exp. vessel 25/1.5 [6bar]	
Flamco nr.	25303	
GTIN	08712874253032	
Type	<u>Baseflex 8 - 80</u>	
Vand- indhold [l]	25	
Fortryk i [bar]	1,5	
Maks. driftstryk [bar]	6	
Dimensioner	A [mm]	290
	B [mm]	479
	Ø C [mm]	-
	D [mm]	-
Tilsl. (E)	G $\frac{3}{4}$ " M	
Vægt [kg]	4,2	





Generel data

Etim gruppe	Pressure increase/decrease
Etim klasse	Membratryk ekspansionsbeholder
Produkt navn	Baseflex exp. ves. 25L/1.5 [6bar]
Brand	Flamco
Udførelse	25L/1.5 [6bar]

Detaljer

Sluttryk [bar]	6
Til drikkevand	Nej
Volume [l]	25
Fortryk [bar]	1.5
Med fast væg støtte	Nej
Position, lodret	Ja
Maksimal mellemtemperatur (kontinuerlig) [°C]	70
Position, vandret	Nej
Med ben	Nej
Med udskiftelig membran	Nej
Nominel indvendig diameter, ekspansionsforbindelse	¾" (20)
Yderrørdiameter, ekspansionsforbindelse [mm]	26.5
Tilslutning	Udvendig gevind parallel gas (BSPP)
Farve	Rød
Diameter [mm]	290
Højde [mm]	479

Find flere oplysninger online:

[Monterings- og driftsvejledning](#)

[Declaration of conformity PED 2014/68/EU](#)

[PED Module D](#)

[PED Module D1](#)

[EU Declaration of Conformity Module A](#)

[Baseflex DWG](#)

[Baseflex STEP](#)

[Baseflex RFA](#)

Flamco Danmark
Tonsbakken 16-18
DK-2740, Skovlunde - dk

T +45 44 94 02 07
E info@flamco.dk
I flamcogroup.com/dk